


# Pipe Joints

## For Hot Gases

- A range of pipe joints for sealing gases at high temperatures and pressures
- Easy push fit assembly
- Accommodates up to 3½° misalignment
- Unrestricted rotational and axial movement
- Rings made from Haynes® 25 corrosion resisting alloy
- Bore surface coated with Tribomet® T 104C Chrome Carbide/Cobalt composite coating developed and patented by BAJ Ltd
- Typical operating conditions:-  
Pressure 16.67 bar (250 p.s.i.)  
Temperature 650°C (1200°F)

Publication No. CMR40/3  
Issue Date: 03/2011

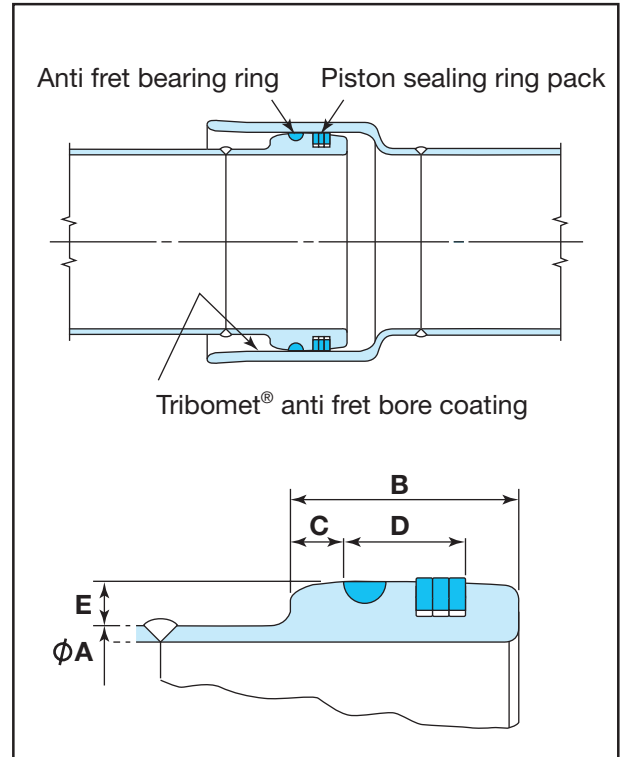

Tribomet® is a registered trademark  
Haynes® is a registered trademark of the Cabot Corporation

### Typical Dimensions (inches)

"A" Nominal Pipe Dia.		B	C	D	E
OVER	UP TO				
.500	.700	.420	.100	.220	.040
.700	1.000	.420	.100	.220	.055
1.000	1.400	.420	.100	.220	.070
1.400	2.000	.468	.100	.268	.098
2.000	2.800	.528	.100	.328	.130
2.800	4.000	.613	.100	.363	.185
4.000	5.500	.760	.100	.510	.245

This tables gives preferred dimensions  
Joint designs can be produced for special applications



www.crossmanufacturing.com

### Cross Manufacturing Company (1938) Ltd

#### Head Office & Factory:

Midford Road, Combe Down  
Bath BA2 5RR England

Tel: +44 (0) 1225 837000

Fax: +44 (0) 1225 834115

Email: mail@crossmanufacturing.com

#### Devizs Factory:

Hopton Park, London Road  
Devizs SN10 2EY England

Tel: +44 (0) 1380 722421

Fax: +44 (0) 1380 722405

Email: mail@cross-devizes.com